

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 724 209 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
31.07.1996 Bulletin 1996/31

(51) Int. Cl.<sup>6</sup>: G06F 1/26

(21) Application number: 95480196.5

(22) Date of filing: 20.12.1995

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 25.01.1995 US 377912

(71) Applicant: INTERNATIONAL BUSINESS  
MACHINES CORPORATION  
Armonk, NY 10504 (US)

(72) Inventor: Masleid, Robert Paul  
Austin, Texas 78758 (US)

(74) Representative: Schuffenecker, Thierry  
Compagnie IBM France,  
Département de Propriété Intellectuelle  
06610 La Gaude (FR)

## (54) Power management system for integrated circuits

(57) A system for controlling the application of power by a power supply to a load. The inventive system includes a first circuit for drawing power from the power supply and a second circuit for controlling the amount of power drawn by the first circuit from the power supply. The amount of power drawn from the power supply is gradually increased prior to the application of power to the load and gradually decreased after removal of power from the load. In the illustrative embodiment, the first circuit is a digitally controlled resistance and the second circuit is a digital counter which supplies a control word for the digitally controlled resistance. A high order bit from the counter enables the gating of clock pulses to the load circuit. As a result, activation of the load circuit is delayed while the invention gradually varies the amount of power drawn from the power supply to a desired threshold level. The gradual draw of power from the supply significantly mitigates transients ordinarily associated with the application of clock pulses to a load circuit at machine startup or removal of clock pulses at machine shutdown.

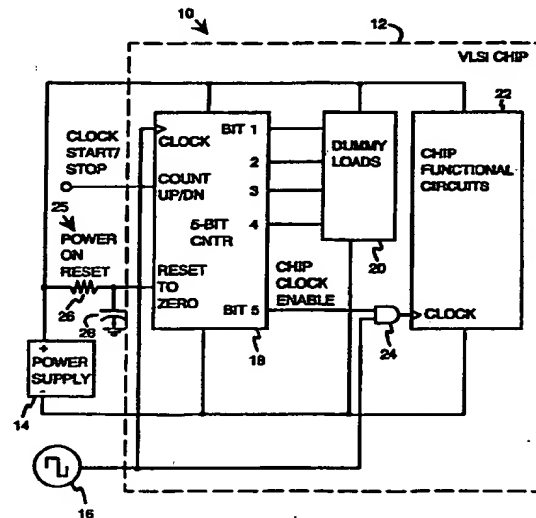


FIGURE 1

## Description

### FIELD OF THE INVENTION

The present invention relates to electronic circuits. More specifically, the present invention relates to circuits and systems for supplying power to very large scale integrated circuits (VLSI).

### BACKGROUND OF THE INVENTION

Power supplies for integrated circuits (ICs) include inductive elements which generate transients due to machine startup, particularly clock start and clock stop.

The transients manifest as noise which is unacceptable for certain applications. The problem is particularly acute in high performance VLSI chips.

The conventional solution is to use large decoupling capacitors between the power supply and ground. These capacitors must be supplied on the chip or off the chip. On-chip capacitors are expensive to implement and consume valuable die area. Off-chip capacitors are not as effective.

A second conventional approach to the problem involves the use of resistors between the power supply and the load. However, this often results in a degradation of voltage regulation.

Thus, there is a need in the art for a system or technique for mitigating power supply transients on the application of power to integrated circuits.

### SUMMARY OF THE INVENTION

The need in the art is addressed by the present invention which provides a system for controlling the application of power by a power supply to a load. The inventive system includes a first circuit for drawing power from the power supply and a second circuit for controlling the amount of power drawn by the first circuit from the power supply. The amount of power drawn from the power supply is gradually increased prior to the application of power to the load and gradually decreased after removal of power from the load.

In the illustrative embodiment, the first circuit is a digitally controlled resistance and the second circuit is a digital counter which supplies a control word for the digitally controlled resistance. A high order bit from the counter enables the gating of clock pulses to the load circuit. As a result, activation of the load circuit is delayed while the invention gradually varies the amount of power drawn from the power supply to a desired threshold level. The gradual draw of power from the supply significantly mitigates transients ordinarily associated with the application of clock pulses to a load circuit at machine startup or removal of clock pulses at machine shutdown.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of an illustrative implementation of the system for controlling the application of power by a power supply to a load of the present invention.

Fig. 2 is a schematic diagram of the dummy load of the system depicted in Fig. 1.

Fig. 3 shows timing diagrams illustrative of the operation of the system of the present invention.

## DESCRIPTION OF THE INVENTION

Illustrative embodiments and exemplary applications will now be described with reference to the accompanying drawings to disclose the advantageous teachings of the present invention.

While the present invention is described herein with reference to illustrative embodiments for particular applications, it should be understood that the invention is not limited thereto. Those having ordinary skill in the art and access to the teachings provided herein will recognize additional modifications, applications, and embodiments within the scope thereof and additional fields in which the present invention would be of significant utility.

Fig. 1 is a block diagram of an illustrative implementation of the system for controlling the application of power by a power supply to a load of the present invention. The overall circuit 10 includes a VLSI chip 12 on which the present invention is implemented. The VLSI chip 12 is connected to a conventional power supply 14 and a clock 16. Power is supplied to the chip 12 via a conventional RC filter 25 including a resistor 26 and a capacitor 28. A clock start/stop signal is supplied to the chip 12 by a controlling device (not shown).

In accordance with the present teachings, power from the power supply, the clock and the clock stop/start signals are applied to a counter 18 implemented in the illustrative embodiment on chip as five bit counter. When these signals are applied, the counter 18 begins to count clock pulses up or down depending on the value of the clock stop start signal. A typical count sequence is illustrated below:

```

00000
00001
00010
00011
00100
00110
00111
01000
01001
01010
01011
01100
01101
01110
01111

```

10000

In accordance with the present teachings, a selected set of these outputs from the digital counter 18 are used to vary the resistance of a dummy load 20 implemented, in the illustrative embodiment, as a digitally controlled resistance. As shown in Fig. 1, the dummy loads are connected in parallel with the power supply 14 and the chip functional circuits 22.

Fig. 2 is a schematic diagram of the dummy load 20. In accordance with the invention, four outputs from the counter 18 are used to control the dummy load 20. An additional output is used to gate the clock in the chip functional circuits 22 via an AND gate 24 in the manner described more fully below.

As the counter counts up or down through the sequence illustrative above, various combinations of resistors are activated via a plurality of buffer amplifiers 30, 32, 34 and 36. In the illustrative embodiment the resistive elements are implemented with transistors 40 - 54 (even numbers only). Thus, the least significant bit of the counter is connected to the gate of a first transistor 40 which, in the illustrative embodiment, is sized to draw 1/16th the nominal steady state current ordinarily drawn by the chip functional circuits 22. Bit 2 from the counter 18 is connected to the gate of a second transistor 42 which is sized to draw 1/8th of the chip current. Bit 3 from the counter is connected to the gates of third and fourth transistors 44 and 46 which are sized to draw in combination 1/4th the chip current and bit 4 is connected to the gates of fifth, sixth, seventh and eighth transistors 48, 50, 52 and 54, respectively, which are sized to draw, in combination, 1/2 the nominal chip current.

Switching transients due to the switching of the dummy load transistors may be expected to be comparable to the cycle-to-cycle transients inside the functional circuits 22 and may be addressed in a conventional manner if necessary.

Fig. 3 shows timing diagrams illustrative of the operation of the system of the present invention. At power on (t1, the power supply is on (Fig. 3(a)) and at t2, the RC filter 25 output voltage begins to rise. At t3, the filter 25 output voltage reaches a maximum and provides a reset to zero signal for the counter 18 (Fig. 3(b)). Hence, the counter output is subsequently reset to zero (Fig. 3(c)). At this point, bits 1 - 5 of the counter 18 are set at zero. Hence, all loads are shut down and the 'chip clock enable' signal of Fig. 3(d) is low. The chip current demand (Fig. 3(g)) and total current demanded of the power supply (Fig. 3(h)) are both close to zero. When at t4 the 'clock start' signal is applied to the counter 18 (Fig. 3(e)), the counter increments (Fig. 3(c)) and activates the loads in binary sequence. In the illustrative embodiment, each count or clock pulse increases current demand by 1/16th of full functional load. At t5, the loads begin to draw current (Fig. 3(f)) until a maximum desired current threshold is reached at t6. Note the increase in current drawn by the power supply 14 in Fig. 3(h).

At t7, when the counter goes from 15 to 16 (01111 to 10000), the 'chip clock enable' signal goes high (Fig. 3(d)), the chip functional circuits 22 draw current (Fig. 3(g)) and all dummy loads shut down (Fig. 3(f)). Current demand goes from 15/16ths of full functional demand to 16/16ths. At this point, the total power supply current is at a maximum value as shown in Fig. 3(h). The power supply current stays high until the 'clock start' signal goes low at t9 and the counter 18 counts down to zero at t10 (Fig. 3(c)).

When the counter starts counting down, the 'chip clock enable signal' goes low (Fig. 3(d)) and the chip is shut down. During this time, the dummy loads draw current as depicted in Fig. 3(f) and no current is drawn by the chip 22 (Fig. 3(g)). Next, the dummy loads are shut down t12. Note, that the rising and trailing edges of the current drawn from the power supply are smooth. Hence, transient generation is mitigated.

It should be noted that a larger counter will produce smaller transients at the chip. Also, feeding the counter with a slower clock will produce smaller transients at the power supply.

Thus, the present invention has been described herein with reference to a particular embodiment for a particular application. Those having ordinary skill in the art and access to the present teachings will recognize additional modifications applications and embodiments within the scope thereof. For example, those skilled in the art will appreciate that other arrangements may be employed for effecting a gradual draw of power from the power supply without departing from the scope of the present teachings.

It is therefore intended by the appended claims to cover any and all such applications, modifications and embodiments within the scope of the present invention.

## Claims

1. A system for controlling the application of power by a power supply to a load circuit comprising:  
first means for drawing power from the power supply; and  
second means for controlling the amount of power drawn by the first means from the power supply.
2. The invention of Claim 1 further including third means responsive to the second means for selectively activating the load circuit whereby the load circuit draws power from the power supply;  
said third means includes a gate having an output from the counter as a first input and a clock signal as a second input and whereby the gate provides a clock input to the load circuit.
3. The invention of Claim 2 further including means for discontinuing the draw of power from the power supply by the first means on the activation of the load circuit.

4. The invention of Claim 1 wherein the first means includes a voltage controlled resistance connected in parallel with the circuit.
5. The invention of Claim 4 wherein the resistance is a digitally controlled resistance. 5
6. The invention of Claim 5 wherein the second means includes a counter for supplying digital control values to the digitally controlled resistance. 10
7. The invention of Claim 1 wherein the second means includes means for gradually increasing the amount of power drawn from the power supply by the first means. 15
8. The invention of Claim 1 wherein the second means includes means for gradually decreasing the amount of power drawn from the power supply by the first means. 20
9. A system for controlling the application of power by a power supply to a load comprising:  
first means for drawing power from the power supply, the first means including a digitally controlled variable resistance; 25  
second means for controlling the amount of power drawn by the first means from the power supply, the second means including a binary counter for providing digital control words for the variable resistance; and 30  
third means for selectively activating the circuit whereby the circuit draws power from the power supply. 35
10. The invention of Claim 9 wherein the third means includes a gate having an output from the counter as a first input and a clock signal as a second input and whereby the gate provides a clock input to the circuit. 40

45

50

55

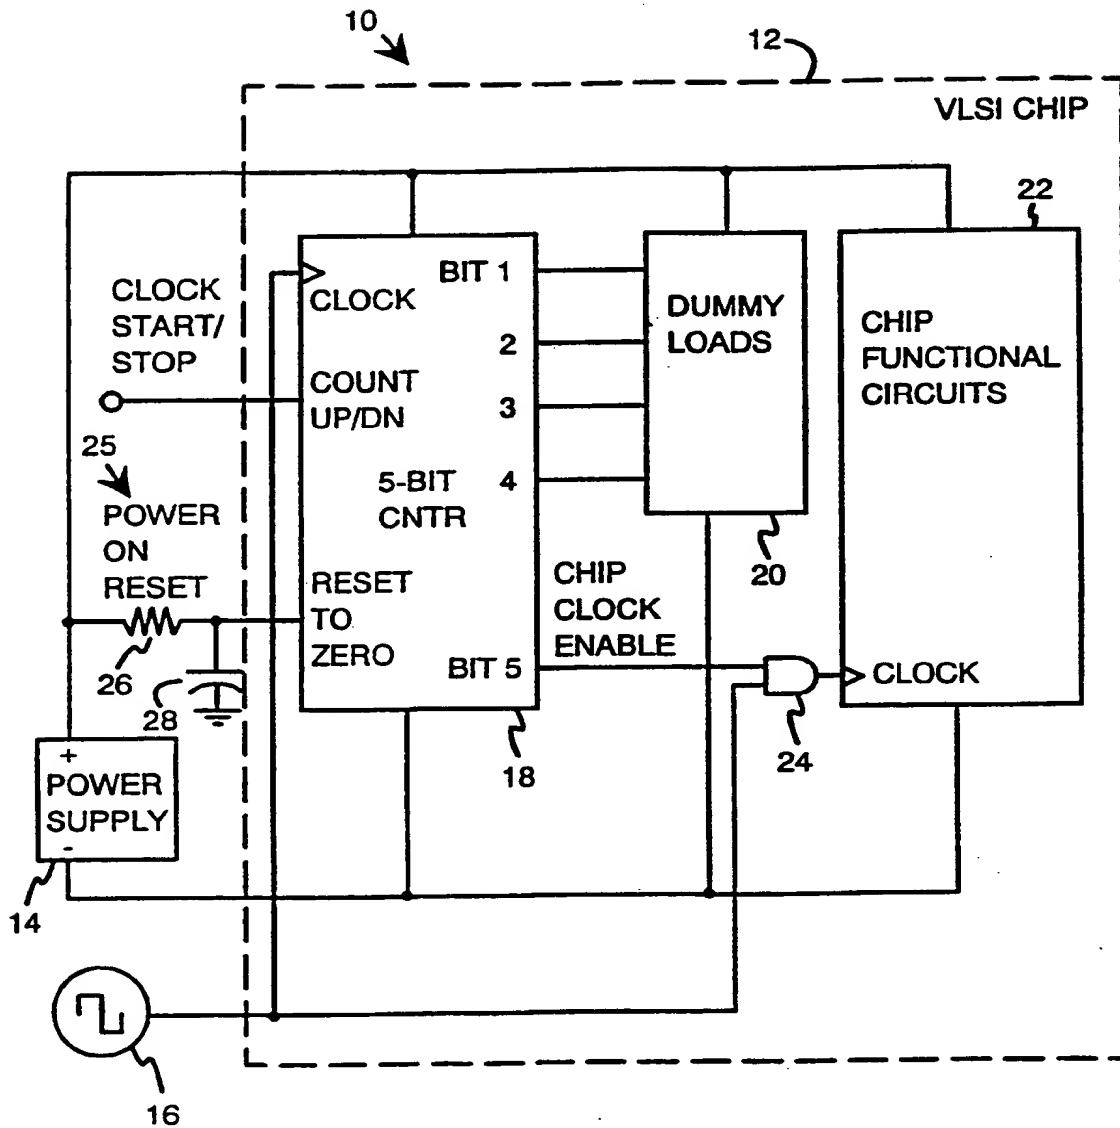


FIGURE 1

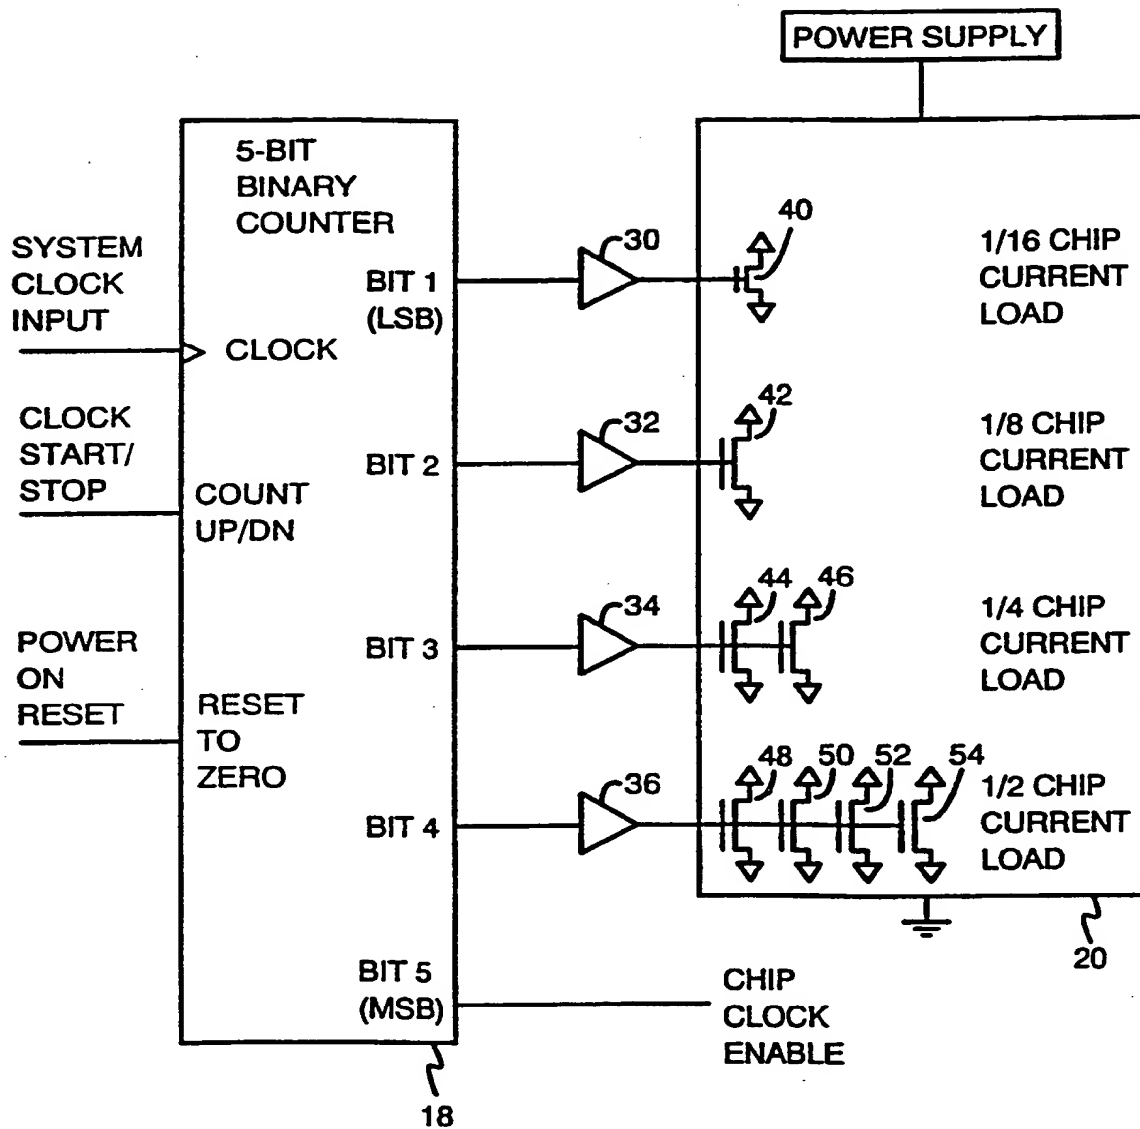


FIGURE 2

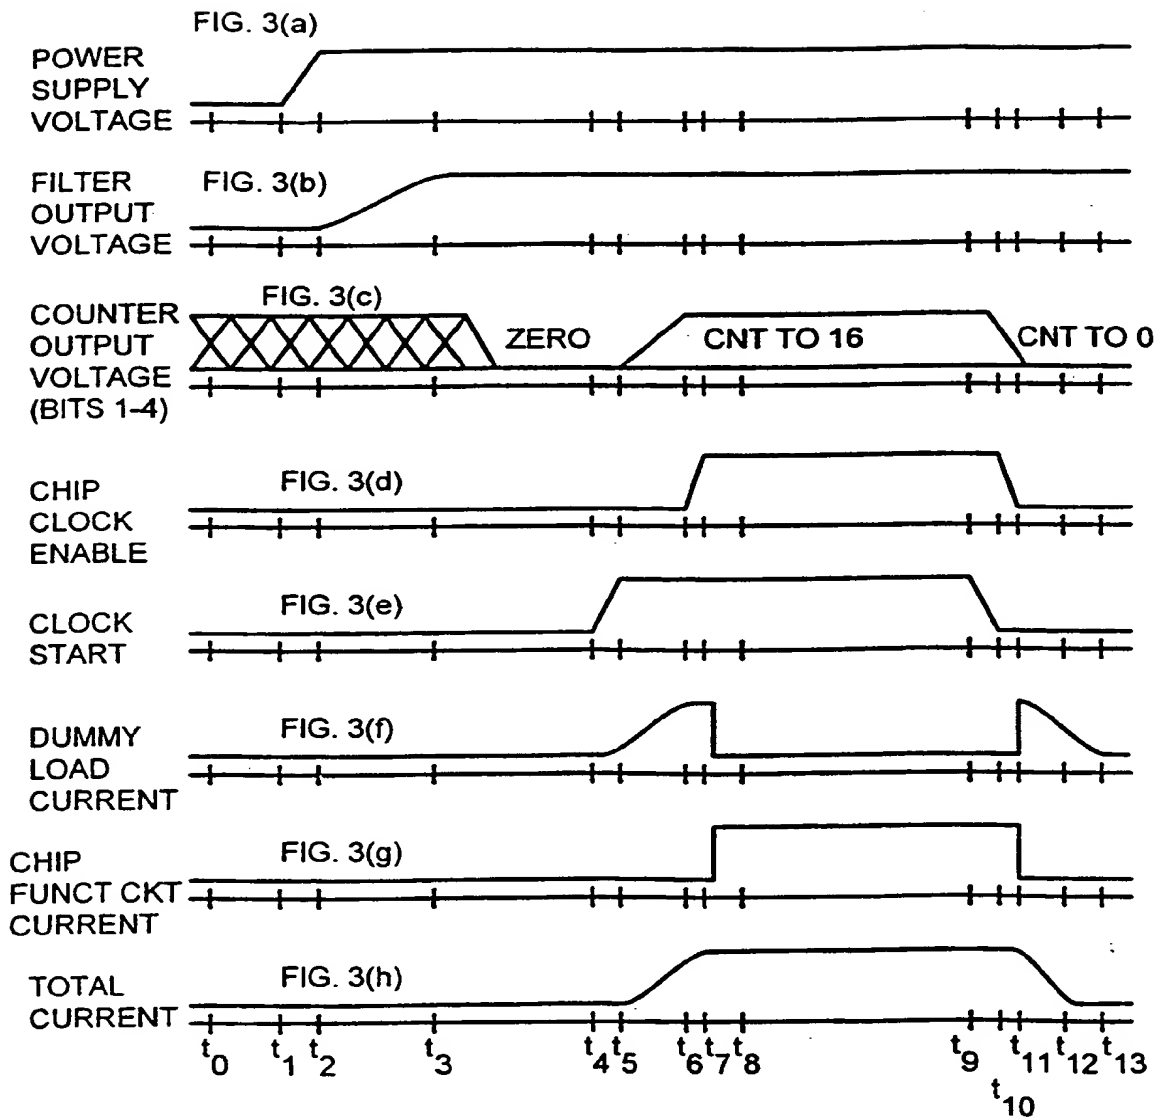


FIGURE 3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 95 48 0196

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	DE-U-92 14 880 (SIEMENS AG) 11 February 1993 * page 9, line 26 - page 10, line 26; figure 3 *	1,7	G06F1/26
X	EP-A-0 430 671 (IBM) 5 June 1991 * column 2, line 36 - column 3, line 4 * * column 3, line 17 - column 4, line 8 *	1,7	
A	DE-A-35 15 611 (SIEMENS AG) 30 October 1986 * page 4, line 26 - page 5, line 13 * * page 5, line 27 - line 35 * * page 7, line 1 - line 28 *	2	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			G06F
Place of search		Date of completion of the search	Examiner
THE HAGUE		13 May 1996	Bailas, A
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 150 01/92 (PM/CI)